



# 50G SPECIFICATIONS

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.


Engine		50G			
Manufacturer and Model	Yanmar 4TNV88C				
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV				
Displacement	2.19 L (134 cu. in.)				
Net Power (ISO 9249)	26.8 kW (35.9 hp) at 2,400 rpm				
Powertrain					
Each track independently driven by hydrostatic axial-piston motor connected to 2-stage planetary gear-reduction box					
Maximum Travel Speed					
Low	2.5 km/h (1.6 mph)				
High	4.2 km/h (2.6 mph)				
Hydraulics					
Closed-center load sensing with 1 variable-displacement pump					
Pump Flow	120.0 L/m (31.7 gpm)				
Auxiliary Flow	87.4 L/m (23.1 gpm)				
Controls	Hydraulic pilot-operated controls for boom, arm, bucket, swing, boom swing, blade, travel, and auxiliary functions				
Electrical					
Alternator Rating	55 amp				
Work Lights	2 halogen: 1 mounted on operator's station and 1 mounted on boom				
Undercarriage					
Track, Rubber	400 mm (16 in.)				
Ground Pressure					
	<i>1380-mm (4 ft. 6 in.) Standard Arm, Canopy, and Standard Counterweight</i>	<i>1380-mm (4 ft. 6 in.) Standard Arm, Cab, and Standard Counterweight</i>	<i>1690-mm (5 ft. 7 in.) Long Arm, Canopy, and Extra Counterweight</i>	<i>1690-mm (5 ft. 7 in.) Long Arm, Cab, and Extra Counterweight</i>	
With Rubber Track	26.9 kPa (3.90 psi)	28.3 kPa (4.10 psi)	28.8 kPa (4.17 psi)	29.5 kPa (4.28 psi)	
Upperstructure					
Swing Speed	9.0 rpm				
Independent Swing Boom					
Left	80 deg.				
Right	60 deg.				
Swing Brake	Spring applied, hydraulically released, automatic, disc type				
Serviceability					
Refill Capacities					
Fuel Tank	70 L (18.5 gal.)				
Cooling System	5.0 L (5.3 qt.)				
Engine Oil With Filter	8.6 L (9.1 qt.)				
Hydraulic Tank	56 L (14.8 gal.)				
Operating Weights					
	<i>1380-mm (4 ft. 6 in.) Standard Arm, Canopy, and Standard Counterweight</i>	<i>1380-mm (4 ft. 6 in.) Standard Arm, Cab, and Standard Counterweight</i>	<i>1690-mm (5 ft. 7 in.) Long Arm, Canopy, and Extra Counterweight</i>	<i>1690-mm (5 ft. 7 in.) Long Arm, Cab, and Extra Counterweight</i>	
With 400-mm (16 in.) Rubber Track, Straight Blade, Full Fuel Tank, and 79-kg (175 lb.) Operator	4790 kg (10,560 lb.)	4920 kg (10,847 lb.)	5018 kg (11,063 lb.)	5148 kg (11,349 lb.)	
Optional Angle Blade	409 kg (902 lb.)	409 kg (902 lb.)	409 kg (902 lb.)	409 kg (902 lb.)	
Counterweight					
Standard	700 kg (1,543 lb.)	700 kg (1,543 lb.)	700 kg (1,543 lb.)	700 kg (1,543 lb.)	
Additional	200 kg (441 lb.)	200 kg (441 lb.)	200 kg (441 lb.)	200 kg (441 lb.)	

# 50G SPECIFICATIONS



While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Operating Dimensions		50G			
		1380-mm (4 ft. 6 in.) Standard Arm and Canopy	1380-mm (4 ft. 6 in.) Standard Arm and Cab	1690-mm (5 ft. 7 in.) Long Arm and Canopy	1690-mm (5 ft. 7 in.) Long Arm and Cab
<b>A</b>	Maximum Cutting Height	5.75 m (18 ft. 10 in.)	5.75 m (18 ft. 10 in.)	6.00 m (19 ft. 8 in.)	6.00 m (19 ft. 8 in.)
<b>B</b>	Maximum Dumping Height	4.07 m (13 ft. 4 in.)	4.07 m (13 ft. 4 in.)	4.31 m (14 ft. 2 in.)	4.31 m (14 ft. 2 in.)
<b>C</b>	Maximum Digging Depth	3.53 m (11 ft. 7 in.)	3.53 m (11 ft. 7 in.)	3.83 m (12 ft. 7 in.)	3.83 m (12 ft. 7 in.)
<b>D</b>	Maximum Digging Reach	5.96 m (19 ft. 7 in.)	5.96 m (19 ft. 7 in.)	6.26 m (20 ft. 6 in.)	6.26 m (20 ft. 6 in.)
<b>E</b>	Minimum Front Swing Radius	2.21 m (7 ft. 3 in.)	2.21 m (7 ft. 3 in.)	2.30 m (7 ft. 7 in.)	2.30 m (7 ft. 7 in.)
<b>F</b>	Transport Length	5.47 m (17 ft. 11 in.)	5.47 m (17 ft. 11 in.)	5.52 m (18 ft. 1 in.)	5.52 m (18 ft. 1 in.)
Digging Force (ISO)					
	Arm	24.0 kN (5,401 lb.)	24.0 kN (5,401 lb.)	21.0 kN (4,718 lb.)	21.0 kN (4,718 lb.)
	Bucket	36.8 kN (8,267 lb.)	36.8 kN (8,267 lb.)	36.8 kN (8,267 lb.)	36.8 kN (8,267 lb.)

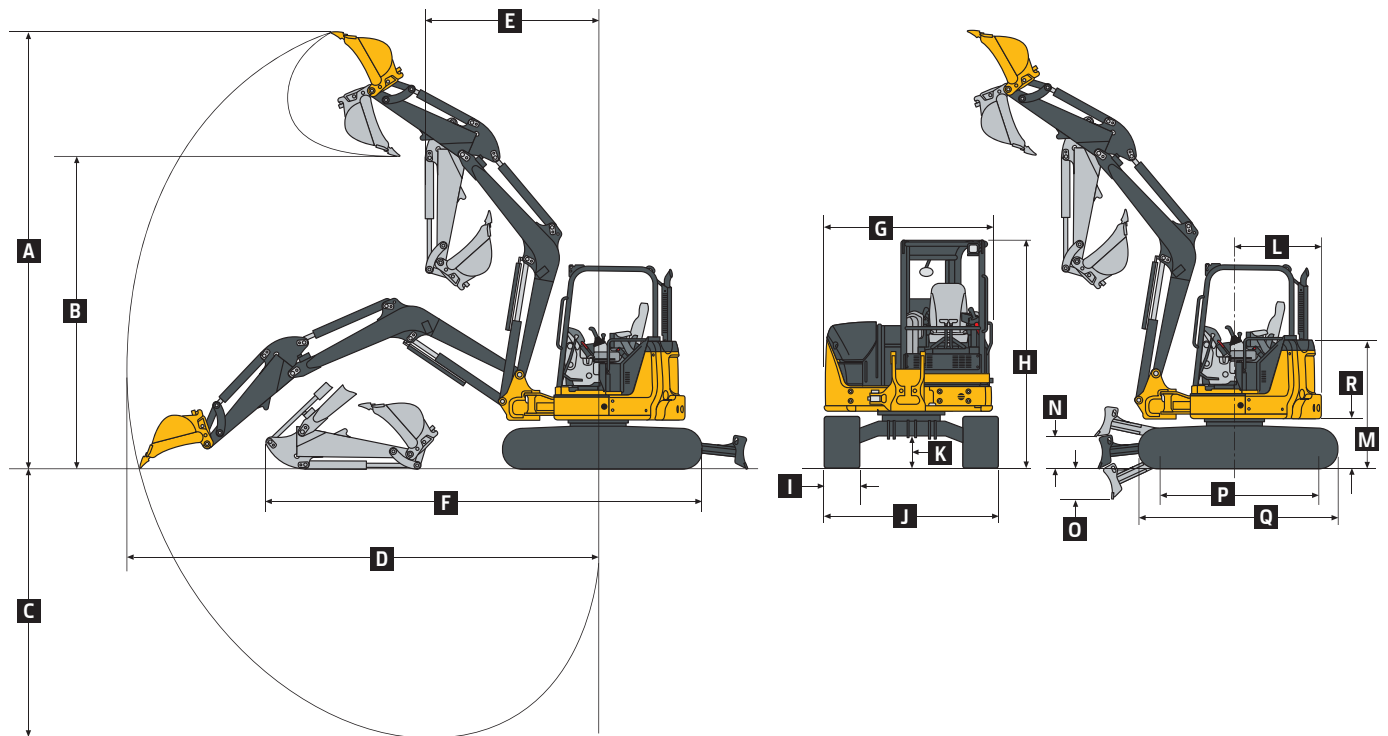

Machine Dimensions			
<b>G</b>	Upperstructure Width	1.85 m (6 ft. 1 in.)	
<b>H</b>	Overall Height		
	Canopy	2.53 m (8 ft. 4 in.)	
	Cab	2.53 m (8 ft. 4 in.)	
<b>I</b>	Track Width	400 mm (16 in.)	
<b>J</b>	Undercarriage Width	2.00 m (6 ft. 7 in.)	
<b>K</b>	Ground Clearance	340 mm (13 in.)	
<b>L</b>	Tail Swing Radius		
	With Standard Arm	1.00 m (39 in.)	
	With Long Arm and Extra Counterweight	1.10 m (43 in.)	
<b>M</b>	Engine Cover Height	1.59 m (5 ft. 3 in.)	
<b>N</b>	Maximum Blade Lift Above Ground	460 mm (18 in.)	
<b>O</b>	Maximum Blade Drop Below Ground	360 mm (14 in.)	
	Blade		
	Width	2.00 m (6 ft. 7 in.)	
	Height	375 mm (15 in.)	
<b>P</b>	Sprocket Center to Idler Center	2.00 m (6 ft. 7 in.)	
<b>Q</b>	Track Length	2.50 m (8 ft. 2 in.)	
<b>R</b>	Counterweight Clearance	610 mm (24 in.)	

## Lift Capacities

**Boldface type** indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Lifting measurement from center of arm to bucket pin; with 400-mm (16 in.) track shoe and blade on ground; and situated on firm, level, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

	Canopy and Standard Counterweight		Cab and Standard Counterweight		Canopy and Extra Counterweight		Cab and Extra Counterweight	
	Over Front*	Over Side	Over Front*	Over Side	Over Front*	Over Side	Over Front*	Over Side
<b>Ground Level at 3.05-m (10 ft.) Radius</b>								
1380-mm (4 ft. 6 in.) Standard Arm	<b>2511 kg</b> (5,531 lb.)	1110 kg (2,444 lb.)	<b>2511 kg</b> (5,531 lb.)	1150 kg (2,534 lb.)	<b>2511 kg</b> (5,531 lb.)	1232 kg (2,714 lb.)	<b>2511 kg</b> (5,531 lb.)	1273 kg (2,803 lb.)
1690-mm (5 ft. 7 in.) Long Arm	<b>2477 kg</b> (5,456 lb.)	1088 kg (2,396 lb.)	<b>2477 kg</b> (5,456 lb.)	1129 kg (2,486 lb.)	<b>2477 kg</b> (5,456 lb.)	1210 kg (2,666 lb.)	<b>2477 kg</b> (5,456 lb.)	1251 kg (2,755 lb.)