

GENERATORS RUN WITH AIRMAN®

WORLD-CLASS SUPPORT

ANA manufactures and sells the industry's highest-quality equipment and provides complete sales and support for AIRMAN and Hokuetsu OEM products.

ANA service professionals are ready to keep your fleet in top condition with 24/7 on call technical support, parts processing, warranty assistance and product training. ANA's online knowledge base includes an extensive library of AIRMAN technical documents and access to SmartEquip® – the premier fleet support platform for parts and service information.

→ Online at www.anacorp.com/support



OPTIONAL ACCESSORIES


ANA stocks a wide variety of genuine AIRMAN generator parts and model-specific accessories.

SMARTLOAD™ LOAD BANK SYSTEM

- Cam-Loks™
- Battery Charger
- Lockable Battery Disconnect
- Battery Blanket
- Engine Block Heater
- Lower Radiator Heater

- Fuel Filter Heater
- Paralleling (SDG125, 150, 220 & 400)
- 4-Position Voltage Selector with 120/240V 3-Phase Delta
- Extended Run Fuel Tank
- Auto Start Option on SDG13LAX
- 5-Yr./10,000-Hr. Extended Warranty
- CSA Certification 🍁
- 600V

TRAILER DIMENSIONS

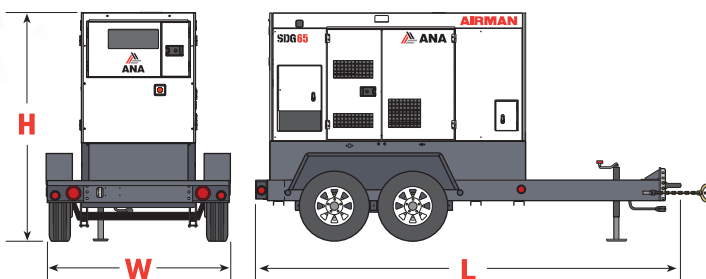

GENERATOR MODEL	LENGTH (L)	WIDTH (W)	HEIGHT (H)
SDG13LAX-8E1	120"	60"	60"
SDG25S-8E1	119"	54"	62"
SDG40S-8E1	144"	70"	73"
SDG45S-8E2	144"	70"	73"
SDG65S-8E1	160"	74"	84.25"
SDG125S-8E1	194"	83.75"	89"
SDG150S-8E1	211"	83.75"	100.6"
SDG220S-8E1	219"	83.75"	103.4"
SDG400S-8E1	270"	92"	127"

All dimensions for standard equipment only. All specifications are subject to change without prior notice.

COMPLETE PRODUCT SUPPORT FROM ANA

AIRMAN[®] SPECIFICATIONS

GENERATOR SPECIFICATIONS	SDG13LAX-8E1	SDG25S-8E1	SDG40S-8E1	SDG45S-8E2	SDG65S-8E1	SDG125S-8E1	SDG150S-8E1	SDG220S-8E1	SDG400S-8E1	
ALTERNATOR TYPE	AIRMAN						TAIYO	STAMFORD	TAIYO	
ARMATURE CONNECTION	Star with Neutral / Zig Zag									
NUMBER OF POLES	4-Pole									
INSULATION	Class F									
EXCITATION	Brushless with AVR									
VOLTAGE REGULATOR	± 0.5%									
POWER FACTOR	0.8									
FREQUENCY	60 Hz									
PRIME POWER	12.5 kVA / 10 kW	25 kVA / 20 kW	36 kVA / 28.8 kW	45 kVA / 36 kW	65 kVA / 51 kW	125 kVA / 100 kW	150 kVA / 120 kW	220 kVA / 176 kW	400 kVA / 320 kW	
STANDBY POWER	13.8 kVA / 11 kW	27.5 kVA / 22 kW	37.8 kVA / 30.2 kW	48.5 kVA / 38.8 kW	69.3 kVA / 55.4 kW	137.5 kVA / 110 kW	165 kVA / 132 kW	242 kVA / 194 kW	420 kVA / 336 kW	
VOLTAGE (SINGLE-PHASE)	120V / 240V (Simultaneous)	120V / 240V / 277V (Switchable)						120V / 127V / 139V / 240V / 254V / 277V (Link Board)		
VOLTAGE (THREE-PHASE)	208V / 240V (Simultaneous)	208V / 240V / 416V / 480V (Switchable)						208V / 220V / 240V / 416V / 440V / 480V (Link Board)		
AMPERAGE										
SINGLE-PHASE (120V)	40 A x 2	60 A x 2	108 A x 2	108 A x 2	152 A x 2	300 A x 2	363 A x 2	491 A x 2	893 A x 2	
SINGLE-PHASE (240V)	40 A	60 A	108 A	108 A	152 A	300 A	363 A	491 A	893 A	
THREE-PHASE (208V)	30 A	65 A	95 A	119 A	167 A	328 A	394 A	608 A	1048 A	
THREE-PHASE (240V)	30 A	60 A	86 A	108 A	152 A	300 A	361 A	529 A	962 A	
THREE-PHASE (480V)	N/A	30 A	43 A	54 A	76 A	150 A	180 A	264 A	481 A	
ENGINE SPECIFICATIONS										
ENGINE	Kubota D1503	Isuzu 4LE2T	Kubota V2403-CR-T	Isuzu 4LE2X	Isuzu 4JJ1X	Isuzu BR-4HK1X	J. Deere 6D6BHF05	J. Deere 6D6BHF06	Isuzu 6WG1X	
EPA EMISSION LEVEL	Tier 4 Final									
DIESEL ENGINE TYPE / CYLINDERS	4-cycle, liquid-cooled direct injection / 3	4-cycle, liquid-cooled direct injection turbocharged / 4	4-cycle, liquid-cooled direct injection turbocharged air-to-air intercooled / 4	4-cycle, liquid-cooled direct injection turbocharged / 4	4-cycle, liquid-cooled direct injection turbocharged intercooled / 4	4-cycle, liquid-cooled direct injection turbocharged air-to-air intercooled / 4	4-cycle, liquid-cooled direct injection turbocharged intercooled / 6	4-cycle, liquid-cooled direct injection turbocharged air-to-air intercooled / 6	6-cycle, liquid-cooled direct injection turbocharged intercooled / 6	
OUTPUT @ RATED SPEED (1800 rpm)	18.4 HP	33.3 HP	44.9 HP	57.7 HP	86.5 HP	147.9 HP	235 HP	323 HP	457.7 HP	
ENGINE SPEED	1800 rpm									
GOVERNOR TYPE	Electronic									
INTEGRAL FUEL TANK CAPACITY	26.4 gal	51.5 gal	84.5 gal	80.5 gal	111 gal	168 gal	204 gal	285 gal	491 gal	
SPILL CONTAINMENT	110%									
DEF TANK CAPACITY	N/A	N/A	N/A	N/A	7.4 gal	7.4 gal	11.7 gal	11.7 gal	25 gal	
LUBRICATING OIL CAPACITY	1.72 gal	2.75 gal	2.6 gal	3.1 gal	4.1 gal	6.1 gal	8.7 gal	8.7 gal	15.8 gal	
COOLANT CAPACITY	1.72 gal	2.75 gal	2.5 gal	2.5 gal	3.4 gal	6.7 gal	7.1 gal	8.1 gal	19.8 gal	
BATTERY	12V x 1, 12V System									
FUEL CONSUMPTION										
FULL LOAD	1.0 gal/hr	1.6 gal/hr	2.3 gal/hr	2.8 gal/hr	3.9 gal/hr	7.2 gal/hr	8.5 gal/hr	12.1 gal/hr	23.1 gal/hr	
75% LOAD	0.77 gal/hr	1.3 gal/hr	1.7 gal/hr	2.1 gal/hr	3.1 gal/hr	5.4 gal/hr	6.9 gal/hr	9.5 gal/hr	17.4 gal/hr	
50% LOAD	0.65 gal/hr	1.0 gal/hr	1.2 gal/hr	1.5 gal/hr	2.3 gal/hr	3.9 gal/hr	5.1 gal/hr	6.8 gal/hr	12.1 gal/hr	
RUNTIME @ FULL LOAD	27.7 hours	32 hours	37 hours	28.75 hours	28.5 hours	23.3 hours	24.0 hours	23.55 hours	21.3 hours	
WEIGHTS & DIMENSIONS										
L x W x H WITHOUT TRAILER	55" x 26" x 46"	67" x 31" x 55"	74.8" x 38.2" x 61.4"	74.8" x 38.2" x 61.4"	97" x 39" x 67"	113.4" x 51.2" x 72.8"	129.9" x 51.2" x 84.6"	137.8" x 51.2" x 87.4"	177" x 59" x 107.5"	
L x W x H WITH TRAILER	120" x 60" x 60"	119" x 54" x 62"	144" x 70" x 73"	144" x 70" x 73"	160" x 74" x 84.25"	194" x 83.75" x 89"	211" x 83.75" x 100.6"	219" x 83.75" x 103.4"	270" x 92" x 127"	
GVWR	1,995 lb	2,849 lb	4,247 lb	4,519 lb	5,414 lb	8,352 lb	9,838 lb	11,021 lb	19,602 lb	
TRAILER WEIGHT	494 lb	644 lb	1,182 lb	1,182 lb	1,225 lb	1,650 lb	1,350 lb	1,365 lb	2,650 lb	
DRY / OPERATING WEIGHT (GEN. ONLY)	1,290 lb / 1,500 lb	1,808 lb / 2,205 lb	2,426 lb / 3,065 lb	2,954 lb / 3,337 lb	3,307 lb / 4,189 lb	5,379 lb / 6,702 lb	6,878 lb / 8,488 lb	7,452 lb / 9,656 lb	13,206 lb / 17,042 lb	
SOUND LEVEL @ 23 FT (NO/FULL LOAD)	58 / 61 dBA	57 / 63 dBA	57 / 61 dBA	57 / 61 dBA	59 / 65 dBA	66 / 67 dBA	61 / 67 dBA	63 / 69 dBA	67 / 70 dBA	

All specifications are subject to change without prior notice. Visit anacorp.com for the most current information.

NATIONWIDE STOCKING LOCATIONS

ANA Nevada

1740 Raiders Way
Henderson, NV 89052

ANA S. California

11100 Hope Street
Cypress, CA 90630

ANA N. California

1315 Vinci Avenue
Sacramento, CA 95838

ANA South Carolina

1335 Hayne Street
Spartanburg, SC 29301

ANA Texas

10440 Brockwood Road
Dallas, TX 75338



ANA, Inc.
Executive Office

1770 Raiders Way, Henderson, NV 89052

ANACORP.COM

(562) 450-3570 // sales@anacorp.com



We make your world easier.